

Industrial Maintenance Group, Inc.

Pre-Fabricated Customized Wall Containment

Industrial Maintenance Group, Inc. (IMG) custom made containment wall can be prefabricated in our warehouse and shipped directly to your site for installation. We offer various sizes and lengths per site needs and design. Installation services available upon request.



Wall Height Considerations:

- Containment Volume
- Amount of wall below grade
- Thickness of wall
- Anchor points

Structural Coating System

Highlights and Advantages:

- ✓ 3500 PSI at 60 mils thick
- ✓ 300% or Greater Elongation
- ✓ Service Temperatures of -40 to 250 degrees F
- ✓ Fire Retardant available upon request

NOTE: The above data represents coating strength only.

The final product will be considerable stronger depending on custom parameters and desired wall thickness.

For more information, Contact:

Pete Van Fossen


Cell: 813-478-4224

Office: 813-659-3512

STEPS TO CUSTOMIZATION:

- STEP #1 - Determine requested wall thickness. IMG can supply various thicknesses per site needs. Typical thicknesses are 2, 4, & 6 inches. Special thicknesses can be produced.
- STEP #2 - Determine wall height requirements and anchor needs.
- STEP #3 - Measure site requirements, straight runs, lengths, corners and complete layout.
- STEP #4 - Ship to site for installation.

Installation kit will include attachment brackets and sealing caulk for corners and straight run attachments, rebar for anchoring.

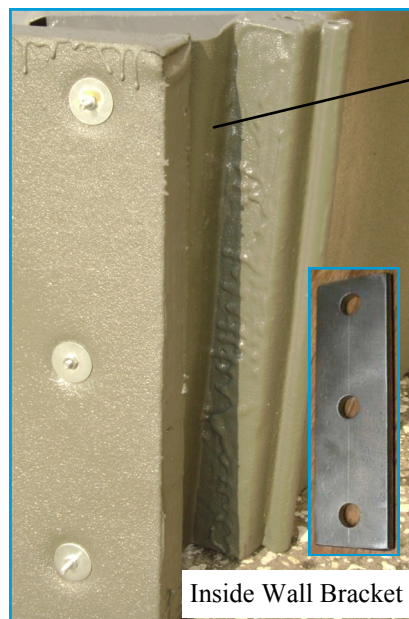

Inside Wall Bracket

Wall attachments remain flexible for field attachment and layout adjustments while still providing a strong interface.



Attached tubing allows for anchor points to be used at any desired interval using rebar or other anchor profile.